McMurdo Station, Ross Island

BUILDING INFORMATION SHEET

NSF Dorm

Location ID: B188

Two-story dormitory used primarily to house transient personnel. The first floor contains 9 two-person rooms, a restroom, a lounge, a laundry room and a mechanical room. The second floor contains 12 two-person rooms and a restroom.

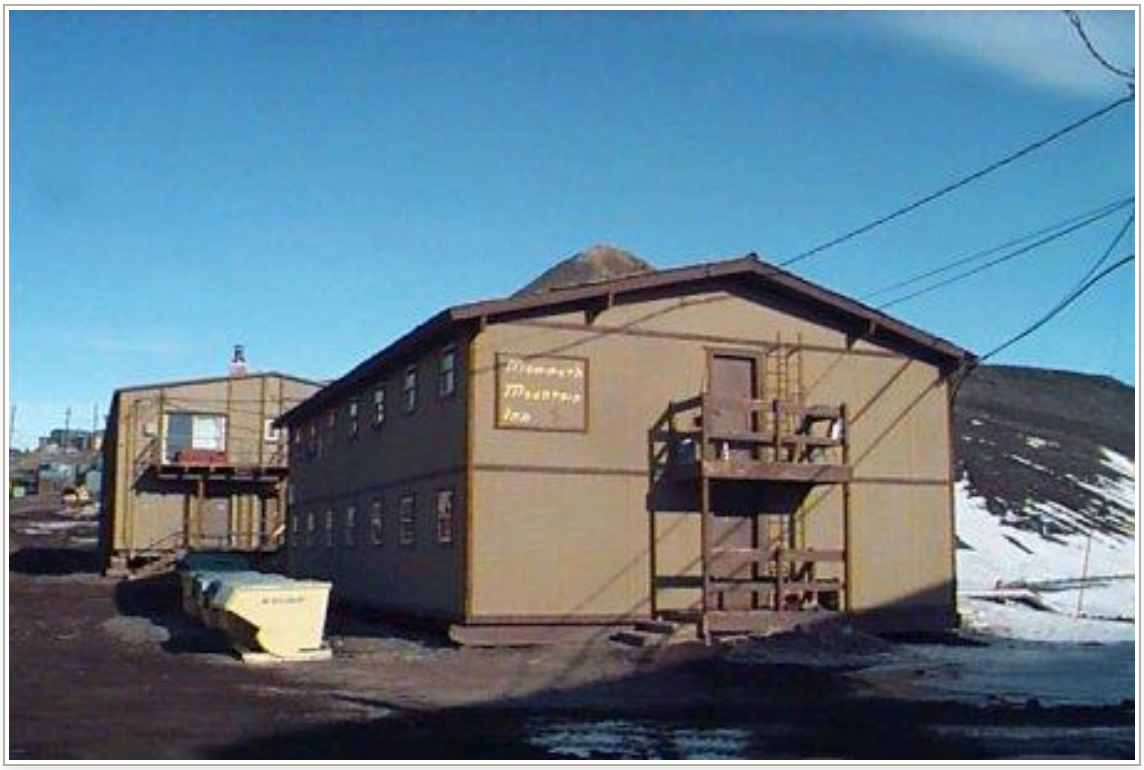


Photo 1: *NSF Dorm*

General Structure Information

Usage	Berthing, Mammoth Mountain Inn (MMI)
Occupancy Group	R-1 Dormitory
Maximum Occupancy	49
Construction Type	Type V, N, combustible; wood-framed exterior walls with plywood sexterior and gypsum board interior sheathing, wood-framed roof with wood-shake roofing, steel- and wood-framed plywood floor, wood-framed gypsum board interior partitions.
Year Constructed	1976
Dimensions	33' x 57'

Floor Area

Floor	Area
Floor 1	1,881 sq ft
Floor 2	1,881 sq ft
Total	3,762 sq ft

HVAC System

Heating	Two Hydrotherm oil-burning glycol boiler (274,800 Btu/hr each) Boiler temperature controlled with an outdoor reset, a Honeywell

	Aquatrol W964F. There is baseboard heat throughout the building.
Air Handling Units	None
Fuel Tank	Tied into Building 166's 1,000 gallon fuel tank

Water and Sewer

Water Service	2" stub off the 4" main
Sewer Service	4" stub off the 4" main
Connections	Sinks: 5 Toilets: 4 Urinals: 2 Showers: 4 Washing Machine: 1 Two lines with two instruments
Water Heater	82 gallon electric water heater

Electrical Service

Service Feeder	Feeder B
Electrical Service	208/120V, 3PH

Phone and LAN	Two lines with two instruments

Fire System

Fire Panel Type	King-Fisher KF-24-DS control and KFRTI-WP-8 radio interface/transmitter panels, pull stations, alarm bells
Heat Detectors	Located throughout building
Suppression Type	Automatic dry-chemical fire extinguisher located over boiler.

Floorplans

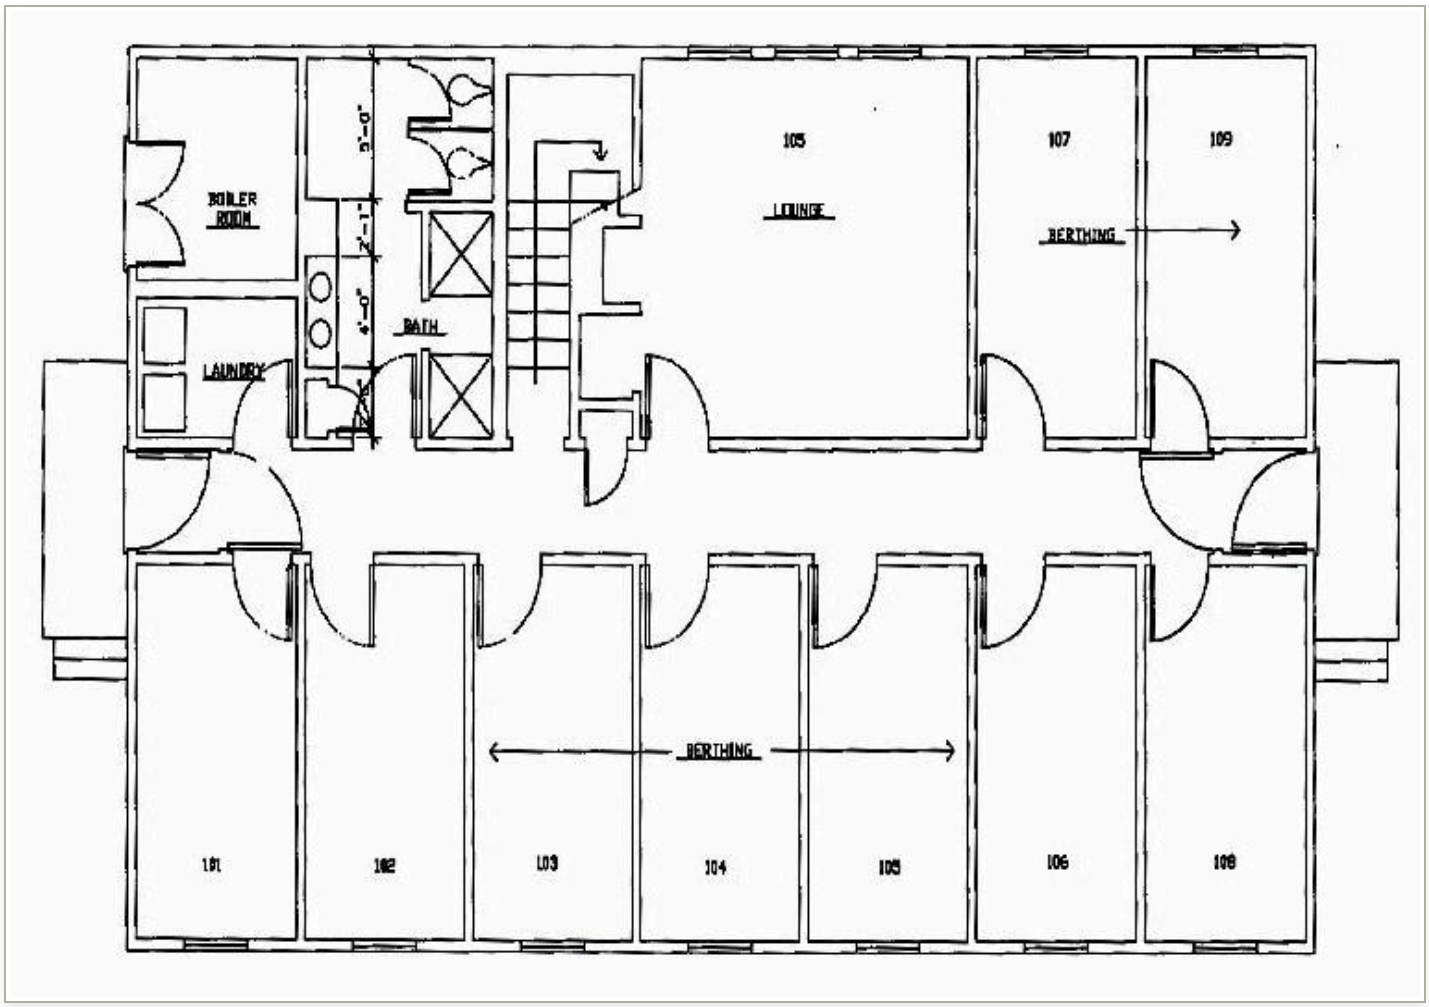


Figure 1: *NSF Dorm*

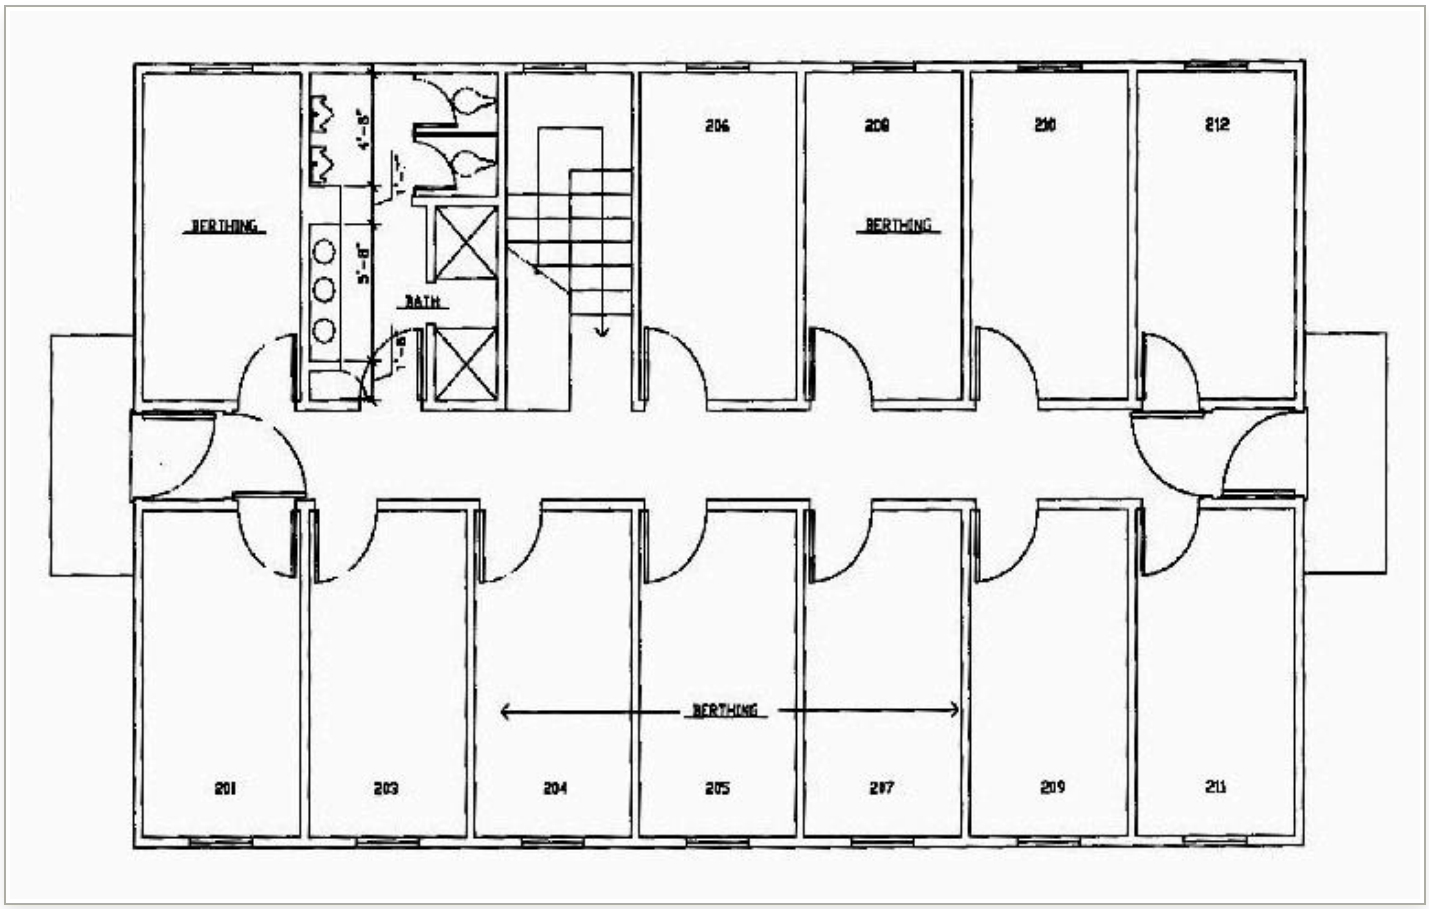


Figure 2: *NSF Dorm*