## McMurdo Station, Ross Island

BUILDING INFORMATION SHEET

# Dorm

## Location ID: B201

Two-story personnel dormitory housing up to 54 persons. The first floor inlcudes 11 two-person rooms, an entry foyer, a mechanical room, two storage rooms, two communal bathrooms, and a lounge. The second floor includes 16 two-person rooms, two bathrooms, and a laundry room.



***Photo 1:*** *Dorm*

# General Structure Information

| | |
|---|---|
| **Usage** | Dormitory |
| **Occupancy Group** | R-1 Dormitory |
| **Maximum Occupancy** | 98 |
| **Construction Type** | Type V, N, combustible; two-story, wood-framed exterior walls and roof with 5-1/2" fiberglass insulation, foam-backed aluminum<br>siding and cedar shake roofing. Wood-framed gypsum board interior partitions. |
| **Year Constructed** | 1979 |
| **Dimensions** | 39' x 109' |

**Floor Area**

| Floor | Area |
|---|---|
| Floor 1 | 4,251 sq ft |
| Floor 2 | 4,251 sq ft |
| **Total** | 8,502 sq ft |

# HVAC System

| | |
|---|---|
| **Heating** | One Kewanee oil-fired glycol boiler (1,350,000 Btu/hr) with glycol baseboard heaters |

| | |
|---|---|
| **Air Handling Units** | Two central station air handlers supplying tempered fresh air at 60 degrees F with ducted return air. |
| **Fuel Tank** | 900 gallon fuel tank (shared with Dorm 202) |

## Water and Sewer

| | |
|---|---|
| **Water Service** | 2" stub off the 4" main |
| **Sewer Service** | 4" stub off the 6" main |
| **Connections** | Sinks: 17<br>Toilets: 8<br>Urinals: 2<br>Showers:<br>Water Cooler:<br>Washing Machines:<br>Two lines with two instruments |
| **Water Heater** | 120 gallon electric water heater located in 1st floor supply closet. |

## Electrical Service

| | |
|---|---|
| **Service Feeder** | Feeder A |
| **Electrical Service** | 208/120V, 3PH, 225A main breaker |

| | |
|---|---|
| **Phone and LAN** | Two lines with two instruments |

# Fire System

| | |
|---|---|
| **Fire Panel Type** | Pyrotronics System 3 control panel, King-Fisher KFRTI-WP-8 radio interface/transmitter panel, pull stations, alarm horns. Panels<br>located in front entryway. |
| **Heat Detectors** | Halls, bathrooms, boiler room |
| **Suppression Type** | Pre-action sprinkler system connected to Firetrol pump and resevoir in Building 151 and equipped with Star, 3-inch, model D, electromagnetic<br>deluge valve with air pressure supervision. Deluge valve releases upon low air pressure and heat detector actuation. Firetrol pump starts on<br>water pressure loss in main trunk line to dorms. |

# Floorplans

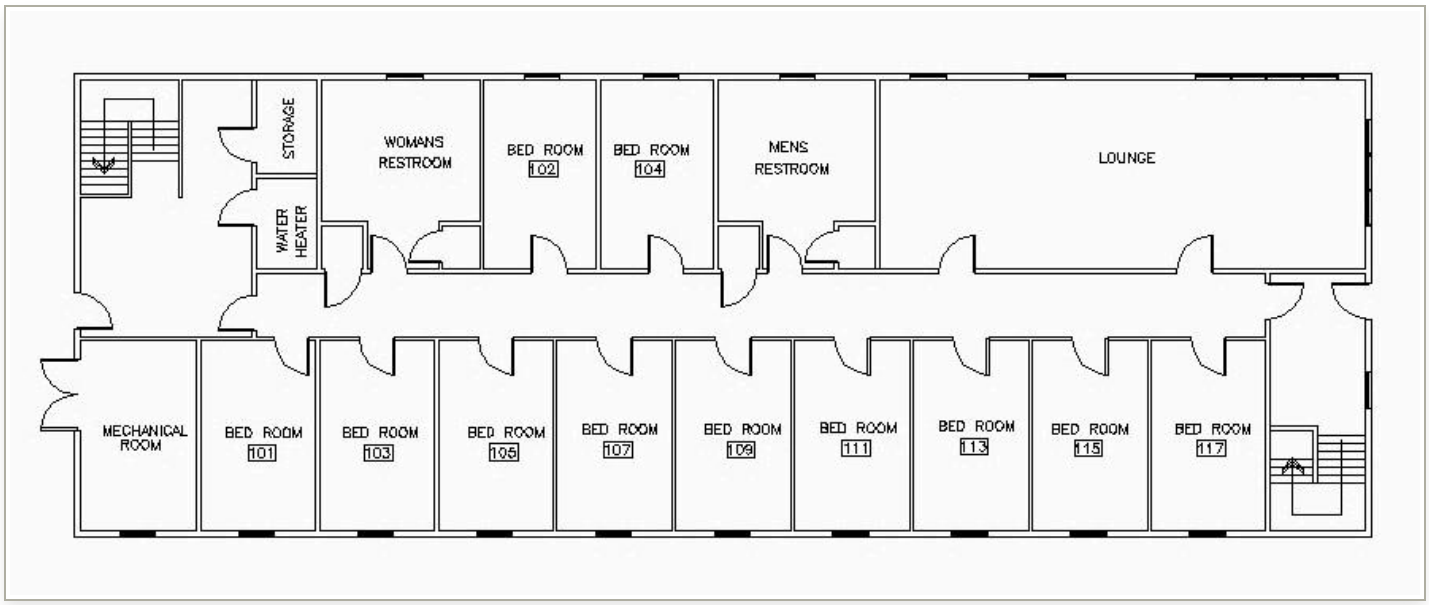



***Figure 1:*** *Dorm*

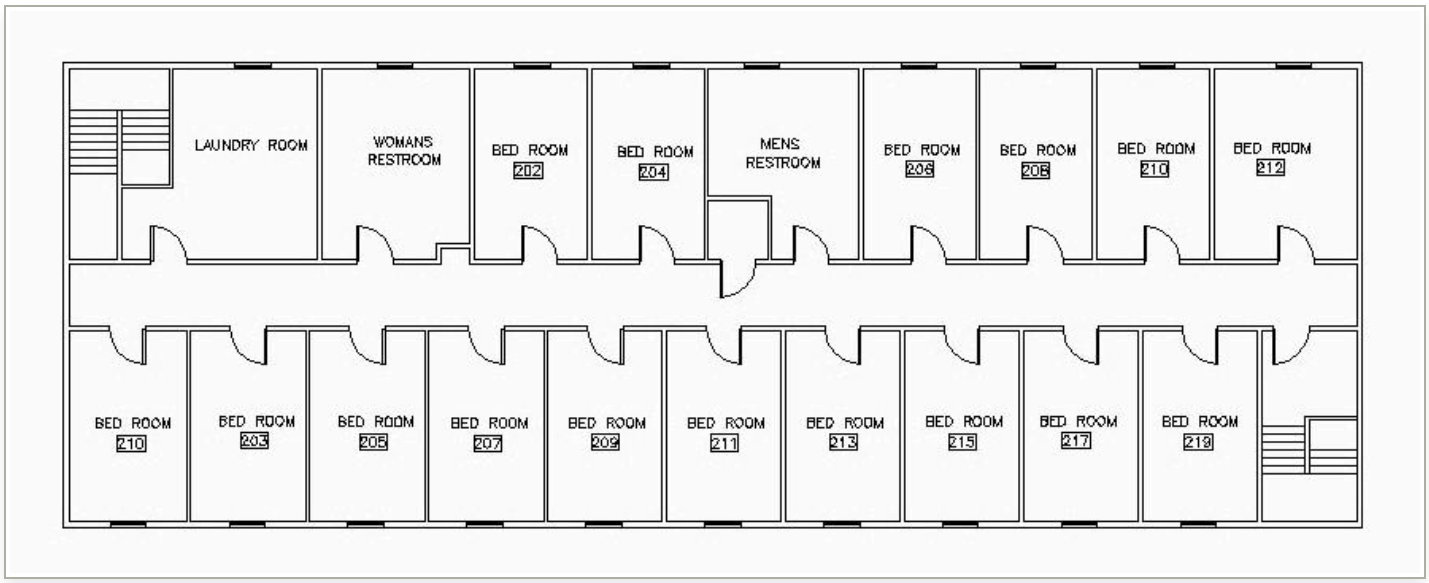



***Figure 2:*** *Dorm*