McMurdo Station, Ross Island

BUILDING INFORMATION SHEET

Dorm

Location ID: B206

Three-story personnel dormitory housing up to 130 persons. The first floor includes 17 two-person rooms, a lounge, a public restroom, and a sauna. The second and third floors each include 24 two-person rooms and a lounge. Each bedroom contains a sink. A toilet with shower and toilet is located between each room. The FY99 winter-over construction schedule includes plans to remodel the third floor lounge, turning it into 2 two-person bedrooms.



Photo 1: *Dorm*

General Structure Information

Usage	Dormitory
Occupancy Group	R-1 Dormitory
Maximum Occupancy	381
Construction Type	Type II, 1-Hour, non-combustible; steel-framed structure with 2-1/2" thick foam-insulated metal siding and roofing, steel-framed heavy timber first floor, steel-framed metal second and third floors. Steel-stud gysum board interior partitions.
Year Constructed	1986-87
Dimensions	48' x 168'
Floor Area	

Floor	Area
Floor 1	8,064 sq ft
Floor 2	8,064 sq ft
Floor 3	8,064 sq ft
Total	24,192 sq ft

HVAC System

Heating	York-Shipley oil-fired glycol boiler (2,009,000 Btu/hr) with glycol circulation pumps and fin-tube baseboard heaters
Air Handling Units	Two Trane, Climate Changer air handling units are located in the building. One is located at each end of the building in the attic vestibule. They supply fresh air only at 60 degrees F.
Fuel Tank	4,500 gallon tank

Water and Sewer

Water Service	2 inch
Sewer Service	4 inch
Connections	Sinks: Toilets: Urinals: 1 Showers: Water Cooler: 1 Washing Machines: 6 Ice Machine: 2 Sauna: 1 100 lines - pending verification for all buildings
Water Heater	Glycol heat exchanger with 440 gallon hot water storage tank

---

Electrical Service

Service Feeder	Feeder A
Electrical Service	208/120V, 3PH, 400A main breaker
Phone and LAN	100 lines - pending verification for all buildings

Fire System

Fire Panel Type	Pyrotronics System 3 control panel, King-Fisher KFRTI-WP-8 radio interface/transmitter panel, pull stations, alarm horns
Suppression Type	Pre-action sprinkler system connected to Firetrol pump and resevoir in Building 151 and equipped with Star, 6-inch, model D, electromagnetic deluge valve with air pressure supervision. Deluge valve releases upon low air pressure and heat detector actuation. Firetrol pump starts on water pressure loss in main trunk line to dorms.

Floorplans

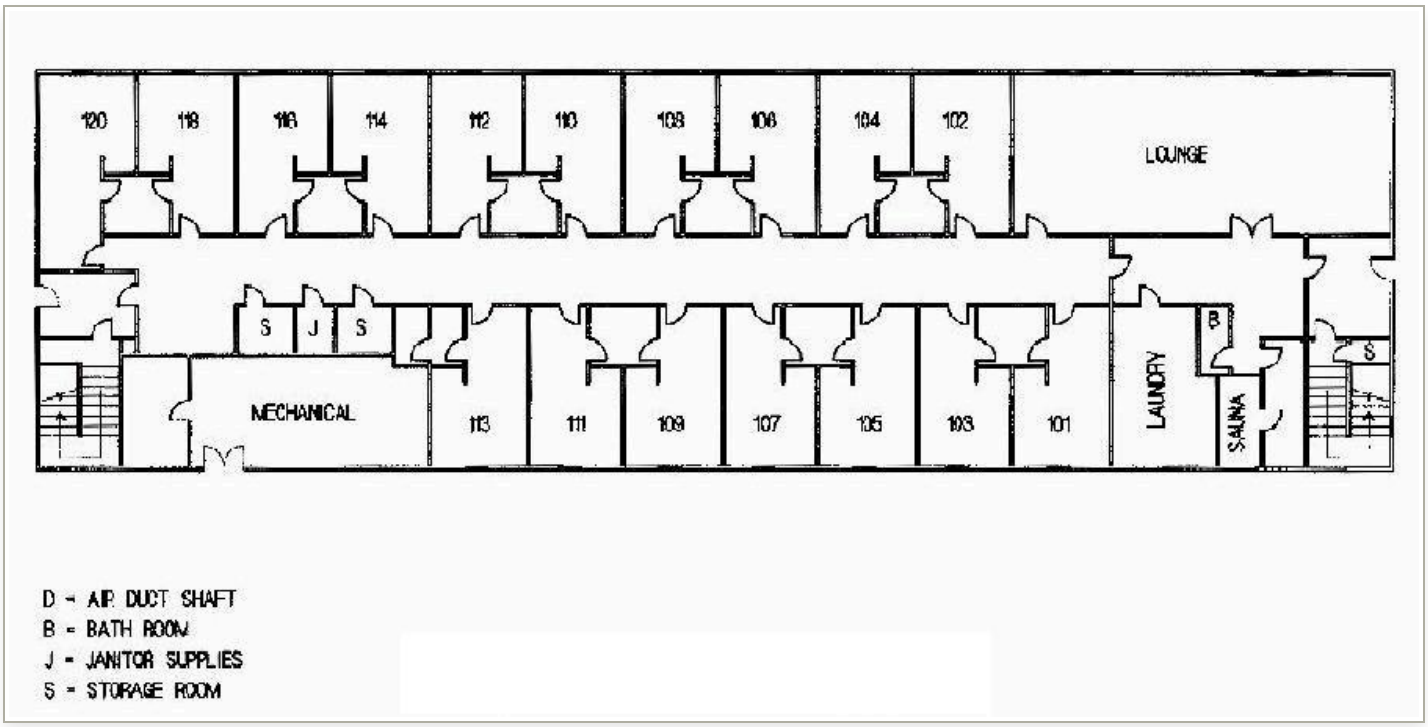


Figure 1: *Dorm*

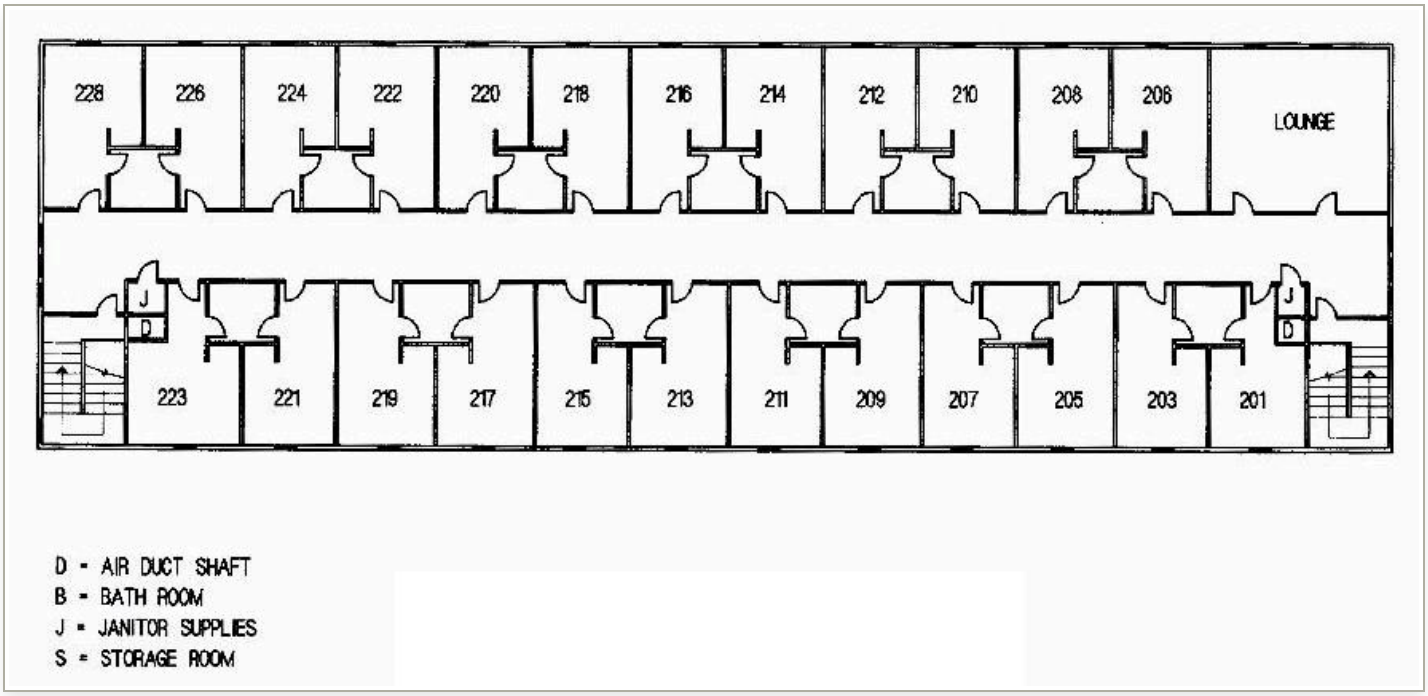


Figure 2: *Dorm*

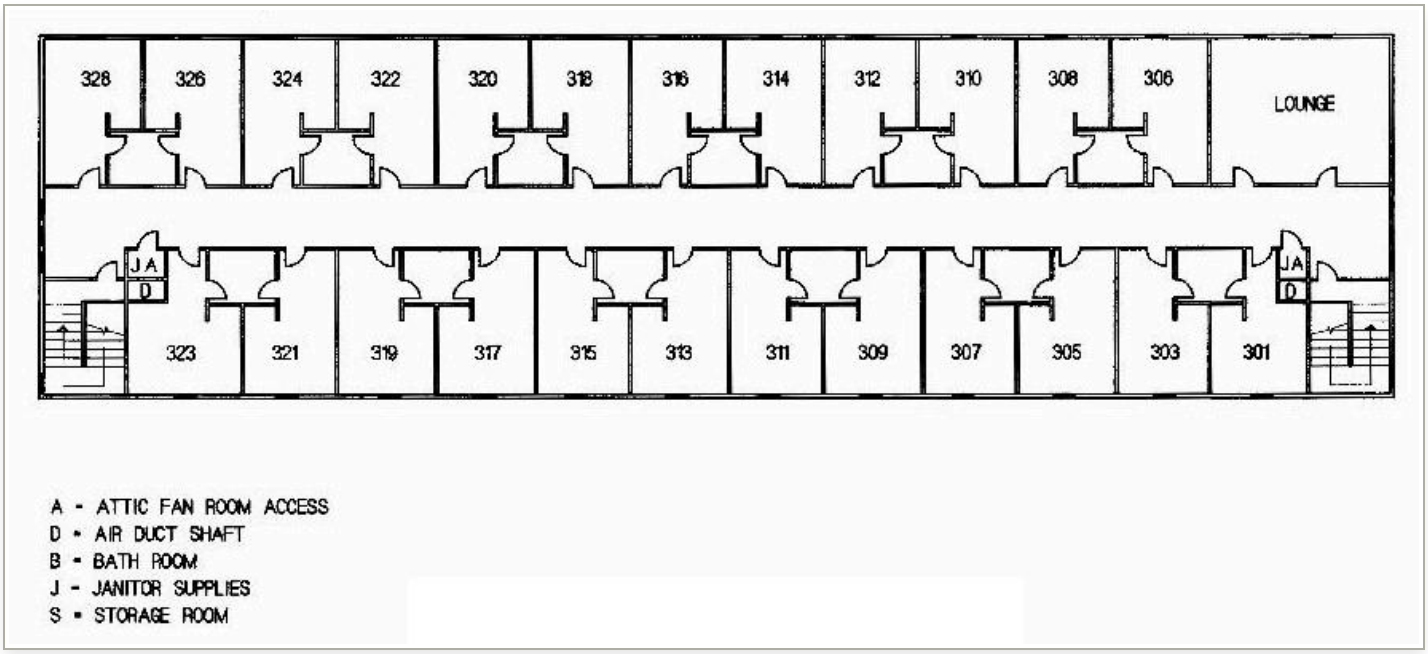


Figure 3: *Dorm*